

1067




Ball valve full flow.
flat lever handle
female/female threads
with Y strainer

minimum and maximum working temperature:
-10°C ,120°C .

Threads:

ISO228(equivalent to DIN259 and BS2779)

opening/closing tests: 10000 times

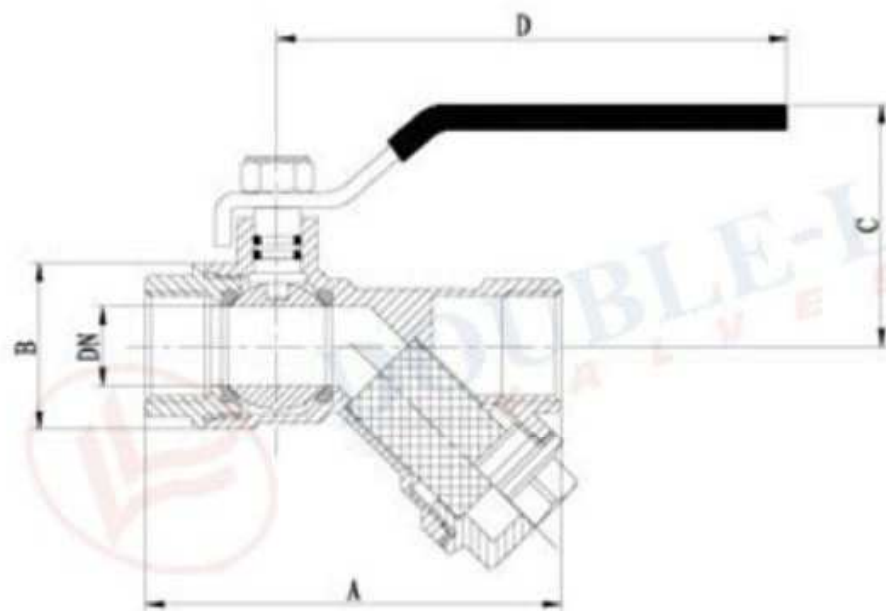

Suitable for water services,
heating and air-conditioning
plants, compressed air systems

Dimension in mm	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
A			78	94	113.5						
B			31	35	45						
C			54	58	64						
D			95	95	126						
DN			14.8	19	24						
PN			25	25	25						