

## Lead Free Flexi Hose



Lead Free Flexible Connectors for general hot and cold water applications

Stock Code	Stock Description
PEF8-15FE150LF	Lead Free Flexi Hose c/w Elbow 15 x 150mm 8b
PEF8-15FE200LF	Lead Free Flexi Hose c/w Elbow 15 x 200mm 8b
PEF8-15FE300LF	Lead Free Flexi Hose c/w Elbow 15 x 300mm 8b
PEF8-15FE400LF	Lead Free Flexi Hose c/w Elbow 15 x 400mm 8b
PEF8-15FE600LF	Lead Free Flexi Hose c/w Elbow 15 x 600mm 8b
PEF8-15FF1000LF	Lead Free Flexi Hose 15 x 1000mm 8b
PEF8-15FF150LF	Lead Free Flexi Hose 15 x 150mm 8b
PEF8-15FF1500LF	Lead Free Flexi Hose 15 x 1500mm 8b
PEF8-15FF200LF	Lead Free Flexi Hose 15 x 200mm 8b
PEF8-15FF300LF	Lead Free Flexi Hose 15 x 300mm 8b
PEF8-15FF400LF	Lead Free Flexi Hose 15 x 400mm 8b
PEF8-15FF500LF	Lead Free Flexi Hose 15 x 500mm 8b
PEF8-15FF600LF	Lead Free Flexi Hose 15 x 600mm 8b

### Features

316 Stainless steel braided tube

Non Corrosive & UV compliant to the new standard

Available in straight & elbow versions

Durable PEX inner tube with 8mm bore

Triple crimped

Maximum operating pressure 1400kpa.

Complaint to AS/NZS3499-202



For more information on this product scan the QR code or visit [hydroflow.co.nz](http://hydroflow.co.nz)



## Product Information

### INSTALLATION INSTRUCTION

Clean all connecting threads.  
Connect flexible hose.  
Tighten till seal and then make half a turn with spanner.

Check for no leaks.  
Suitable for hot water up to 70 degrees  
Stainless steel hose can be installed external to exposed sunlight (UV).


Black Nylon hose not suitable for exposed sunlight (UV).

Can NOT be installed in submersible water.

### 5-Year WARRANTY

This product is covered under warranty on faulty workmanship and materials by manufacturing. The license plumber is responsible for installation and the application is fit for propose. No claim will be approved where the product has been incorrectly installed, twisted, kinks, overstretched, over tightened. Exposure to highly corrosive agents. All claims must be notified within 2 working days. All claims hoses must be sent back to distributor for laboratory appraisal.

Correct Installation

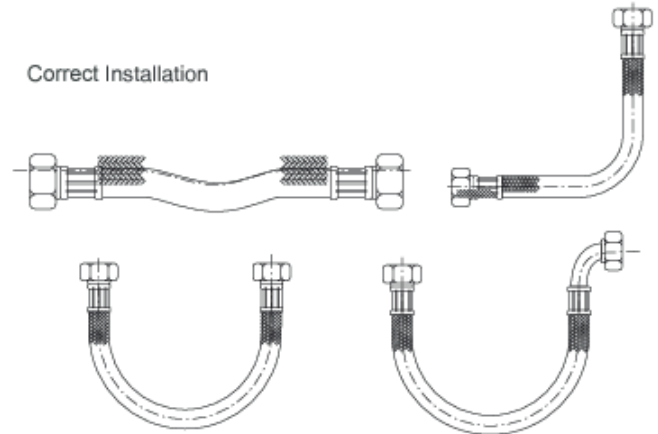

Incorrect Installation

