

Lead Free Ball Valve with Y Strainer



Nickel plated brass ball valve with integrated Y-strainer delivers smooth, full-port flow and filtration in one compact unit. With robust construction and easy maintenance access, it's ideal for demanding plumbing, industrial and process-fluid applications where performance and durability matter most.

Features

Made from high-quality CW511L brass, ensuring excellent strength, corrosion resistance and compliance with New Zealand standards.

Nickel plated brass body

Working temperature 60°C

Maximum operating pressure 2500kpa PN25


WaterMark approved - License No. WM60182



For more information on this product scan the QR code or visit hydroflow.co.nz



Stock Code	Stock Description
HFBVYFF15LF	Lead Free Brass Ball Valve with Y Strainer 15mm
HFBVYFF20LF	Lead Free Brass Ball Valve with Y Strainer 20mm
HFBVYFF25LF	Lead Free Brass Ball Valve with Y Strainer 25mm
HFBVYFF15SHLF	Lead Free Brass Ball Valve with Y Strainer 15mm S/H
HFBVYFF20SHLF	Lead Free Brass Ball Valve with Y Strainer 20mm S/H
HFBVYFF25SHLF	Lead Free Brass Ball Valve with Y Strainer 25mm S/H

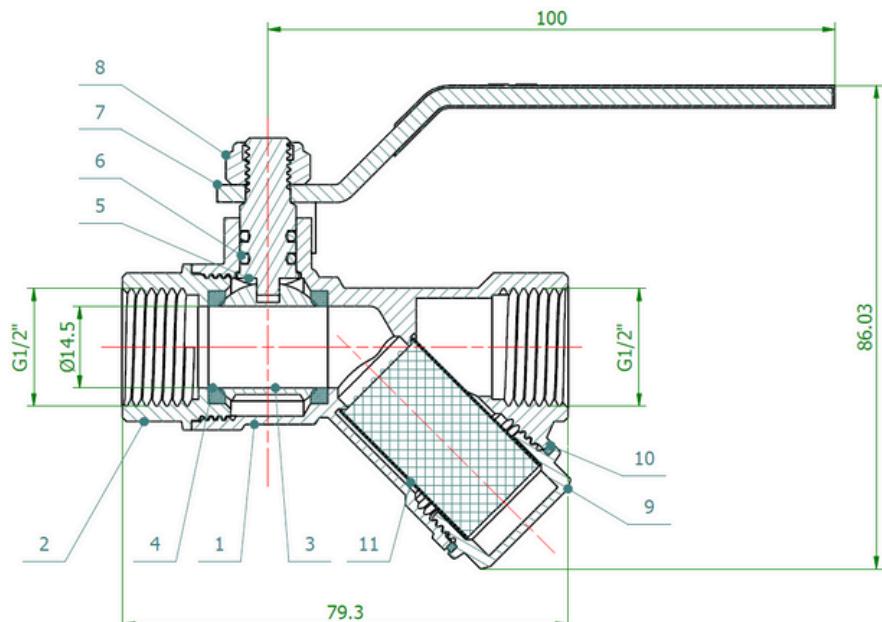

No.	Name	Material
1	Body	HPb57-3
2	Bonnet	HPb57-3
3	Ball	HPb57-3
4	Packing	PTFE
5	Stem	HPb57-3
6	O-ring	NBR
7	Handle	A3 Steel+PVC
8	Lock Nut	A3 Steel
9	Filter Mesh Cover	HPb57-3
10	Packing	PTFE
11	Filter Mesh	SS304

