

Lead Free Spring Check Valve



Lead-free spring check valves are designed to ensure safe, reliable, and hygienic water flow control for plumbing and water distribution systems.

Features

Made from high-quality CW511L brass, ensuring excellent strength, corrosion resistance and compliance with New Zealand standards.

Integrated spring-loaded mechanism allows flow in one direction and prevents reverse flow, protecting system integrity.

Includes AISI 304 stainless steel spring and EPDM sealing for long-term resistance to wear, corrosion, and water hammer.

Maximum operating pressure 1400kpa PN14

Temperature rating 0-60 ° C

WaterMark approved - License No. WM60183





For more information on this product scan the QR code or visit hydroflow.co.nz



Spring Check Valve

PRODUCT CODE	PRODUCT DESCRIPTION
HFSCV15LF	Lead Free Spring Check Valve 15mm
HFSCV20LF	Lead Free Spring Check Valve 20mm
HFSCV25LF	Lead Free Spring Check Valve 25mm
HFSCV32LF	Lead Free Spring Check Valve 32mm
HFSCV40LF	Lead Free Spring Check Valve 40mm
HFSCV50LF	Lead Free Spring Check Valve 50mm

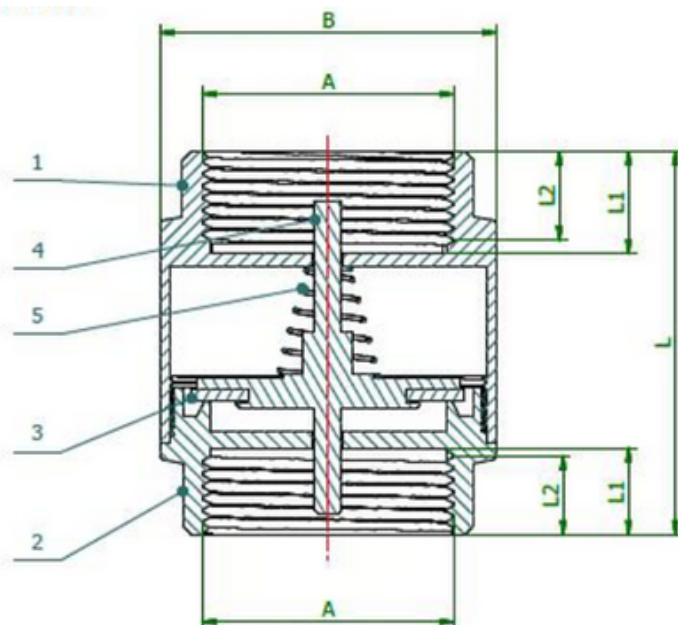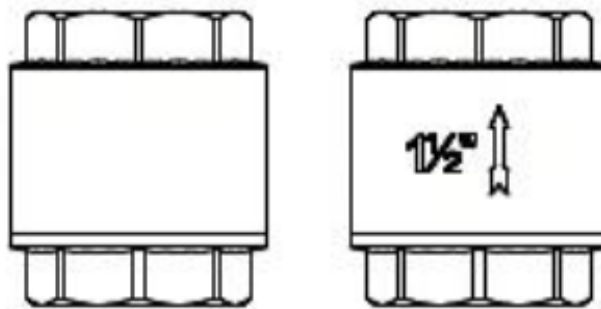

DN	A	B	L	L1	L2
15	RP1/2	29.8	58.35	17	15.5
20	RP3/4	40.5	60.5	18	16.5
25	RP1/2	43.5	73	21.5	19.5
32	RP4	55.8	80.5	23.5	21.5
40	RP1 1/2	64	83.5	23.5	21.5
50	RP2	75	96.5	28	26
65	RP2 1/2	95	114.5	32.5	30.5
80	RP3/4	109.5	117	33.5	33.3
100	RP4	142.5	153.5	41.5	39.5

No.	Description	Material	QTY
5	Degree Spring	AISI 304	1
4	Water Baffle	ABS	1
3	Gasket	EPDM	1
2	Valve	CW511L	1
1	Body	CW511L	1