

Lead Free Water Ball Valve



Lead free nickel plated DZR brass ball valves are designed to deliver reliable shut-off performance for residential, commercial, and industrial water systems in New Zealand.

Features

Made from high-quality CW511L brass, ensuring excellent strength, corrosion resistance and compliance with New Zealand standards

Equipped with PTFE seats and EPDM o-rings for leak-free performance

304 stainless steel PVC coated lever handle for comfortable operation and durability in outdoor conditions

Maximum operating pressure 2500kpa PN25

Temperature rating 0-80°C

WaterMark approved - License No. WM60182



For more information on this product scan the QR code or visit hydroflow.co.nz





Female Female Long Handle

PRODUCT CODE	PRODUCT DESCRIPTION
HFBVFF15LF	Lead Free Brass Ball Valve F/F 15mm
HFBVFF20LF	Lead Free Brass Ball Valve F/F 20mm
HFBVFF25LF	Lead Free Brass Ball Valve F/F 25mm
HFBVFF32LF	Lead Free Brass Ball Valve F/F 32mm
HFBVFF40LF	Lead Free Brass Ball Valve F/F 40mm
HFBVFF50LF	Lead Free Brass Ball Valve F/F 50mm
HFBVFF65LF	Lead Free Brass Ball Valve F/F 65mm

Male Female Long Handle

PRODUCT CODE	PRODUCT DESCRIPTION
HFBVMF15LF	Lead Free Brass Ball Valve M/F 15mm
HFBVMF20LF	Lead Free Brass Ball Valve M/F 20mm
HFBVMF25LF	Lead Free Brass Ball Valve M/F 25mm
HFBVMF32LF	Lead Free Brass Ball Valve M/F 32mm
HFBVMF40LF	Lead Free Brass Ball Valve M/F 40mm
HFBVMF50LF	Lead Free Brass Ball Valve M/F 50mm

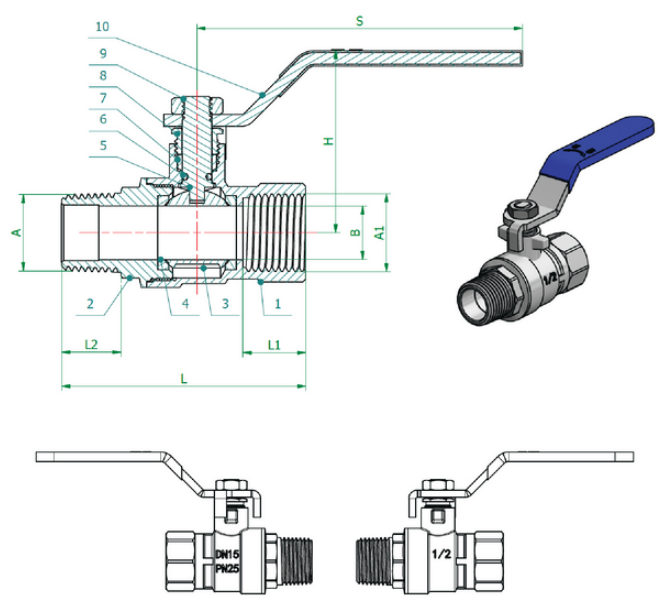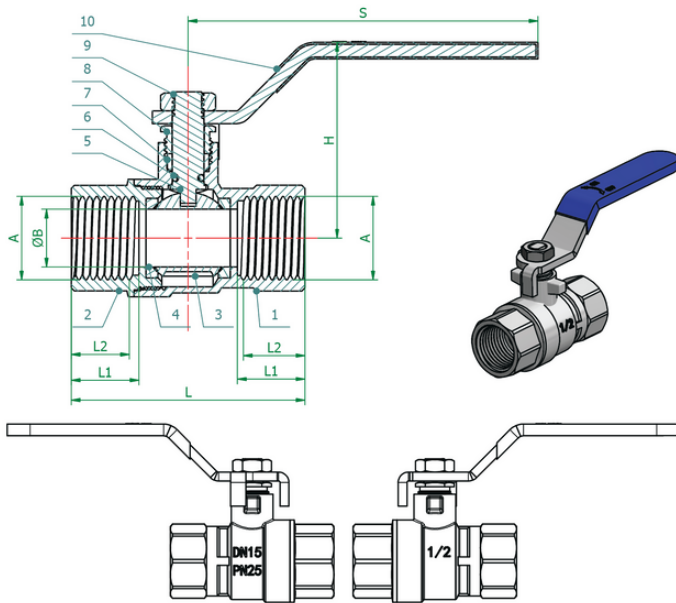

DN	PN	A	B	L	L1	L2	H	S
15	25	G1/2"	15	58.8	17	16	49	88
20	25	G3/4"	19	66.5	18	17	52	100
25	25	G1"	25	76	22	20	62	125
32	25	G1 1/4"	32	91	24	22	81	140
40	25	G1 1/2"	40	99	24	22	88	140
50	25	G2"	49	121	28	26	96	165
65	25	G2 1/2"	60	146	33	31	125	225
80	25	G3"	68	163	36	34	131	225
100	25	G4"	90	198	42	40	147	280

DN	PN	A	A1	B	L	L1	L2	H	S
15	25	R1/2"	R1/2"	14.5	66	17	16	49	88
20	25	R3/4"	R3/4"	19	73	18	17	52	100
25	25	G1"	G1"	24.5	83.5	21.5	17.5	62	125
32	25	R1 1/4"	R1 1/4"	32	99.5	23.5	20.5	81	140
40	25	G1 1/2"	G1 1/2"	40	108	23.5	18.5	88	140
50	25	G2"	G2"	49	131.5	28	25	96	165

No.	Description	Material	QTY
10	Handle	SS304+PVC	1
9	O-ring	EPDM	1
8	Nut	SS304	1
7	Locking cap	HPb57-3	1
6	Packing	PTFE	1
5	Stem	HPb57-3	1
4	Sealing	PTFE	2
3	Ball	SS304	1
2	Bonnet	CW5t1L	1
1	Body	CW5t1L	1

No.	Description	Material	QTY
10	Handle	SS304+PVC	1
9	O-ring	EPDM	1
8	Nut	SS304	1
7	Locking cap	HPb57-3	1
6	Packing	PTFE	1
5	Stem	HPb57-3	1
4	Sealing	PTFE	2
3	Ball	SS304	1
2	Bonnet	CW5t1L	1
1	Body	CW5t1L	1