

Lead Free Water Ball Valve



Lead free nickel plated DZR brass ball valves are designed to deliver reliable shut-off performance for residential, commercial, and industrial water systems in New Zealand.

Features

Made from high-quality CW511L brass, ensuring excellent strength, corrosion resistance and compliance with New Zealand standards

Equipped with PTFE seats and EPDM o-rings for leak-free performance

Short aluminum handle for compact valve applications

Maximum operating pressure 2500kpa PN25

Temperature rating 0-80°C

WaterMark approved - License No. WM60182






For more information on this product scan the QR code or visit hydroflow.co.nz






Female Female Short Handle

PRODUCT CODE	PRODUCT DESCRIPTION
HFBVFF15SHLF	Lead Free Brass Ball Valve F/F 15mm S/H
HFBVFF20SHLF	Lead Free Brass Ball Valve F/F 20mm S/H
HFBVFF25SHLF	Lead Free Brass Ball Valve F/F 25mm S/H

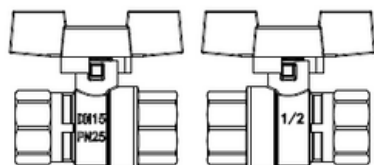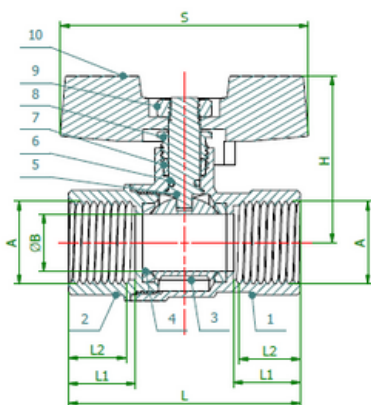

Male Female Short Handle

PRODUCT CODE	PRODUCT DESCRIPTION
HFBVMF15SHLF	Lead Free Brass Ball Valve M/F 15mm S/H
HFBVMF20SHLF	Lead Free Brass Ball Valve M/F 20mm S/H
HFBVMF25SHLF	Lead Free Brass Ball Valve M/F 25mm S/H

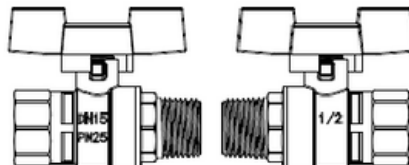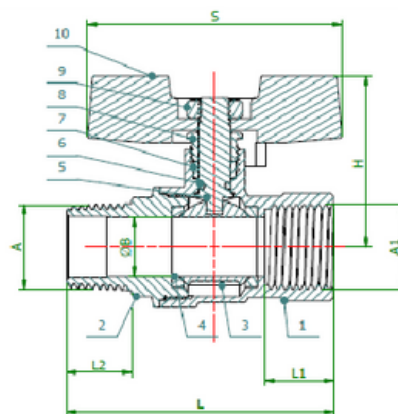

DN	PN	A	B	L	L1	L2	H	S
15	25	G1/2"	14.5	58.8	17	15.5	49	88
20	25	G3/4"	19	66.5	18	16.5	52	100
25	25	G1"	24.5	76	21.5	19.5	62	125
32	25	G1 1/4"	32	91	23.5	21.5	81	140

DN	PN	A	A1	B	L	L1	L2	H	S
15	25	R1/2"	R1/2"	14.5	66	17	16	49	88
20	25	R3/4"	R3/4"	19	73	18	17	52	100
25	25	G1"	G1"	24.5	83.5	21.5	17.5	62	125
32	25	R1 1/4"	R1 1/4"	32	99.5	23.5	20.5	81	140

No.	Description	Material	QTY
10	Handle	Aluminium	1
9	Nut	SS304	1
8	Locking Cap	HPb57-3	1
7	Packing	PTFE	1
6	O-ring	EPDM	1
5	Stem	HPb57-3	1
4	Sealing	PTFE	2
3	Ball	SS304	1
2	Bonnet	CW511L	1
1	Body	CW511L	1

No.	Description	Material	QTY
10	Handle	Aluminium	1
9	Nut	SS304	1
8	Locking Cap	HPb57-3	1
7	Packing	PTFE	1
6	O-ring	EPDM	1
5	Stem	HPb57-3	1
4	Sealing	PTFE	2
3	Ball	SS304	1
2	Bonnet	CW511L	1
1	Body	CW511L	1