

Lead Free Y Strainer



Lead-free Y-Strainers are designed to protect plumbing, pumping, and water distribution systems by filtering out debris and impurities.

Features

Made from CW511L brass, certified safe for potable water applications.

High-quality SS304 stainless steel mesh filter captures particles, protecting valves, pumps, and pipelines from damage.

PTFE spacers ensure tight, leak-free assembly.

Maximum operating pressure 1400kpa PN14

Temperature rating 0-60 ° C

WaterMark approved - License No. WM60185



For more information on this product scan the QR code or visit hydroflow.co.nz







Y Strainer

PRODUCT CODE

PRODUCT DESCRIPTION

HFBYS15LF	Lead Free Brass Y Strainer 15mm
HFBYS20LF	Lead Free Brass Y Strainer 20mm
HFBYS25LF	Lead Free Brass Y Strainer 25mm
HFBYS32LF	Lead Free Brass Y Strainer 32mm
HFBYS40LF	Lead Free Brass Y Strainer 40mm
HFBYS50LF	Lead Free Brass Y Strainer 50mm

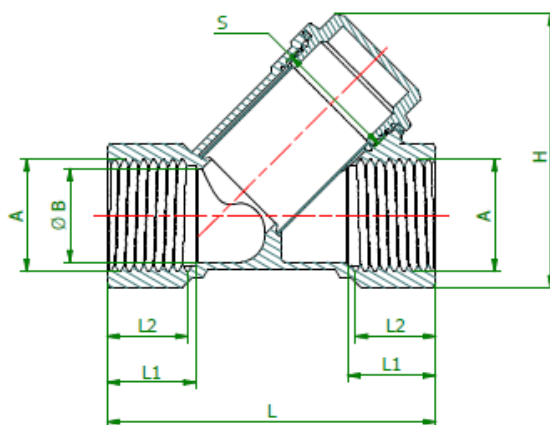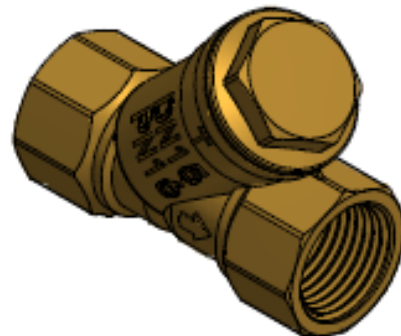

DN	PN	A	B	L	L1	L2	H	S
15	16	G1/2"	17	61.5	16.5	15	51	M23x1.5
20	16	G3/4"	24	68	18	16.5	58	M26x1.5
25	16	G1"	30	81.5	19.2	19.1	70.5	M32x1.5
32	16	G1 1/4"	35.5	104	23.5	21.5	95	M42x1.5
40	16	G1 1/2"	41.5	110.5	23.5	21.5	102.5	M46x1.5
50	16	G2"	52	145	28.5	26.5	125.5	M57x1.5

No.	Description	Material	QTY
4	Spacer	PTFE	1
3	Filter Screen	SS304	1
2	Bonnet	CW511L	1
1	Body	CW511L	1