

# 220 High/Low

Brass Small & Medium Trough Valve



## APPLICATION

Durable Brass, plunger activated valve for medium sized troughs.

## FEATURES & BENEFITS

- Removable seat for lower pressures
- Fully serviceable
- Seat can be removed with a flat screwdriver

## SPECIFICATIONS

**Working Pressure with Seat:** 0 - 1000 kPa (150 psi)

**Working Pressure without Seat:** 0 - 700 kPa (100 psi)

**Flow Rate with Seat:** 14 L/min (3 gal/min) @ 1000 kPa (150 psi)

**Flow Rate without Seat:** 42 L/min (10 gal/min) @ 700 kPa (100 psi)


**Temperature Range:** 1°C - 60°C (34°F - 140°F)

## AVAILABLE SIZES

- 15mm (1/2")
- 20mm (3/4")

## SPARES & ACCESSORIES

- Use 115mm (4") or 150mm (6") float
- Spare arm
- Spare short arm
- Service Kit (contains plunger with washer, cotter pin, and brass nipple)

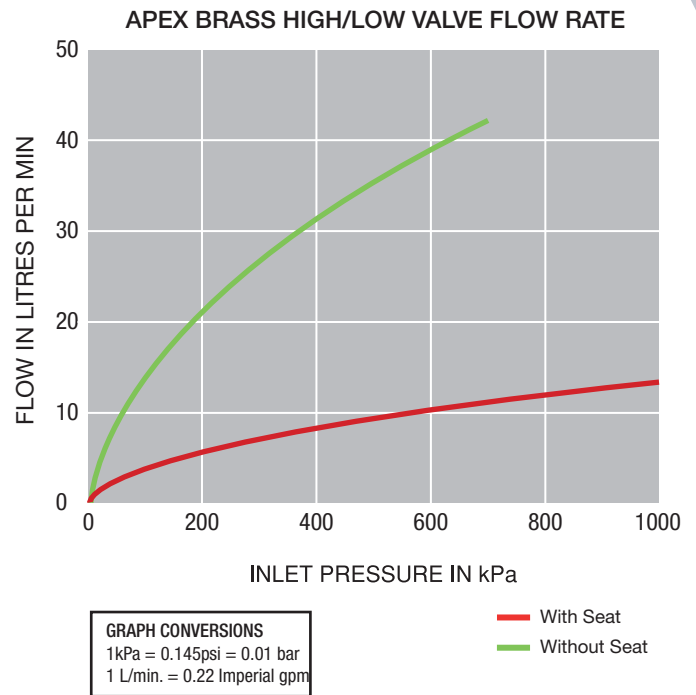

# 225 High/Low

Brass Small & Medium Trough Valve



## APPLICATION

Durable Brass, plunger activated valve for medium sized troughs.

## FEATURES & BENEFITS

- Includes cord and nipple
- Fully serviceable
- Removable seat for lower pressures

## AVAILABLE SIZES

- 15mm (1/2") with cord and nipple
- 20mm (3/4") with cord and nipple

## SPECIFICATIONS

**Working Pressure with Seat:** 0 - 1000 kPa (150 psi)

**Working Pressure without Seat:** 0 - 700 kPa (100 psi)

**Flow Rate with Seat:** 14 L/min (3 gal/min) @ 1000 kPa (150 psi)

**Flow Rate without Seat:** 42 L/min (10 gal/min) @ 700 kPa (100 psi)

**Temperature Range:** 1°C - 60°C (34°F - 140°F)

## SPARES & ACCESSORIES

- Use 115mm (4") or 150mm (6") float
- Service Kit (contains plunger with washer, cotter pin, brass nipple)