

Code	Description	Size	Unit
------	-------------	------	------

## WASHDOWN HOSES

- PVC
- Temperature range 0.5°C to +60°C
- Impact resistant
- Working Pressure - 20mm - 10 BAR, 25mm - 8 BAR, 32mm - 6 BAR, 40mm - 5 BAR

Washdown hose is white and comes in coil lengths only

WDH2030		20mm x 30metres	Coil
WDH2060		20mm x 60metres	Coil
WDH2530		25mm x 30metres	Coil
WDH2560		25mm x 60metres	Coil
WDH3230		32mm x 30metres	Coil
WDH3260		32mm x 60metres	Coil
WDH4030		40mm x 30metres	Coil
WDH4060		40mm x 60metres	Coil



## STOA WASHDOWN HOSE HOLDER WALL MOUNTED

<b>Stainless Steel</b>		<b>Holds</b>	
STOA18W		18mm Hose	Each
<b>Galvanised</b>		<b>Holds</b>	
STOA18WG		18mm Hose	Each
STOA25WG		25mm Hose	Each
STOA32WG		32mm Hose	Each



## STOA FLEX ELECTRICAL CABLE STORAGE SYSTEM

Designed to store and feed out your extension leads tangle free

STOAFW		Each
--------	--	------



Code                      Description                      Size                      Unit

**STARK**

- Stark Hose Swivel Placements:**
- 15 – 20 metre hose – One Swivel placed in middle of hose
  - Longer than 20 metre hose – One Swivel every 10 – 15 metres along the hose length



**INDUSTRIAL STRENGTH STARK SWIVELS**

- For dairy shed washdown hose and portable irrigation and effluent pods
- Prevents twisted pipe & kinks
- Extremely tough construction
- Made from industrial and food grade approved acetyl
- 40 & 50mm Pressure rated to 100psi/7bar/700kPA

**STRAIGHT SWIVEL (STANDARD)**

SHS25SS                      25mm  
SHS32SS                      32mm



**STRAIGHT SWIVEL**

SHS40SS                      40mm  
SHS50SS                      50mm



**CAMLOCK SWIVEL**

SHS40CS                      40mm  
SHS50CS                      50mm



**THREADED SWIVEL**

SHS40TS                      40mm  
SHS50TS                      50mm



Prevents line twisting when dragging portable pods. Using the swivel the pod will follow the ground contour and won't flip.

**Irrigation Pods**



**Effluent Pods**



**Dairy Shed/Yard Hose Pivot**  
Stark Camlock Swivel easily rotates to stop washdown hose twisting and kinking (swivel connected to a camlock and an Anka Female Bend).



## SECTION 8

Code	Description	Size	Unit
------	-------------	------	------

### HOSE NOZZLES

ANKA Hose Nozzles are strong and robust with a quick action on/off movement to a fully adjustable spray pattern. This gives very high flow rates to ensure a fast wash-down time.

- Uniquely designed outer ring; which protects the nozzle from high impact and excessive wear.
- Quick Action on/off; for complete control
- Fully adjustable; wide spray pattern to a full bore flow.
- Serviceable; nozzles can be taken apart for servicing. Service kits available.
- Maximum Working Pressure : 7 bar (700 kpa – 100 psi) @ 20°C

Body : Glass Fibre Reinforced Nylon  
O Ring : Nitrile Rubber  
Nut & Bolt : 302 Stainless Steel  
Threads: BSPT

AHNS20	20mm	Each
AHNS25	25mm	Each
AHNS32	32mm	Each
AHN32	32mm	Each
AHN40	40mm	Each



### ANKA TRIGGER SPRAY GUNS

AHNT20	20mm	Each
AHNT20B	20mm	Blister pack
AHNT20D	20mm	Display Box



### ANKA TRIGGER GUN HOT WATER

85° C. Max Working Pressure 100 psi, High temperature resistant Viton Seals

AHNTHTWNZ	20mm	Each
-----------	------	------



### HOSE TAILS

- Rolled barb
- Long tail
- BSPT threads Glass fibre reinforced Nylon
- Threads : BSPT
- Maximum Working Pressure : 16 bar (1600 psi - 230 psi) @ 20° C

AHT15	15mm	Each
AHT20	20mm	Each
AHT25	25mm	Each
AHT32	32mm	Each
AHT40	40mm	Each
AHT50	50mm	Each



AHT2020/15	20x20x15mm	Each
AHT2520	25 x 20mm	Each
AHT3225	32 x 25mm	Each
AHT4032	40 x 32mm	Each



AHT202015

Code	Description	Size	Unit
------	-------------	------	------

**DOUBLE HOSE TAIL STANDARD AND REDUCING TYPE**

DHT5050		50 - 50mm	
DHT6363		63 - 63mm	
DHT7563		75 - 63mm	
DHT7575		75 - 75mm	
DHT9063		90 - 63mm	
DHT9075		90 - 75mm	
DHT9090		90 - 90mm	


**NON TOXIC TUBING - CLEAR- FOOD GRADE**

*Flexible PVC hoses for industrial, building and agriculture applications. Particular attention has been paid to the formulation of the materials coupled with traditional PVC to improve the characteristics of the hose according to its specific field of application.*

*Also taking into account requirements such as the European Directive 2002/72 further amended by 2007/19/EC on the compliance of plastic materials and articles intended to come into contact with foodstuffs/water.*

- Maximum working pressure 10 BAR 147 psi
- Temperature Range 0.5°C to +70°C
- Length: 30 Metres

	<i>Int. Diam</i>	<i>Ext. Diam</i>
TCA4	4mm	6mm
TCA6	6mm	9mm
TCA8	8mm	12mm
TCA10	10mm	14mm
TCA13	13mm	17mm
TCA15	15mm	19mm
TCA19	19mm	24mm
TCA25	25mm	33mm
TCA32	32mm	41mm
TCA38	38mm	48mm


**NON TOXIC CALF TUBING - CLEAR**

- Maximum working pressure 10 BAR 147 psi
- Temperature Range 0.5°C to +70°C
- Length: 30 Metres

TCA7	6.5mm
------	-------


**NON TOXIC TUBING - CLEAR, REINFORCED**

- Maximum working pressure 10 BAR 147 psi
- Temperature Range 0.5°C to +70°C
- Length: 50 Metres

	<i>Int. Diam</i>	<i>Ext. Diam</i>
TEN450	4mm	10mm
TEN650	6mm	12mm
TEN850	8mm	14mm
TEN1050	10mm	16mm
TEN1350	13mm	19mm
TEN1550	15mm	21mm
TEN19	19mm	26mm
TEN25	25mm	33mm
TEN32	32mm	42mm
TEN38	38mm	48mm



Code                      Description                      Size                      Unit

**GARDEN HOSE**

- PVC
- Intermittent Temperature 0.5°C to +60°C

PTV1220	12mm	20 Metres
PTV1230	12mm	30 Metres
PTV1925	19mm	25 Metres



**WASHING MACHINE HOSES**

**EXTENDABLE WASHING MACHINE HOSE**

- Working temperature: +2% + 60°C
- Flexible and extendable
- Ribbed

WMOH	700mm - 1900mm extension
------	--------------------------



**PARIGI WASHING MACHINE & DISHWASHER INLET HOSE**

- Working temperature 5 – 80° degrees C
- Maximum working pressure 10 bar/146psi
- Maximum bending radius 40mm
- 10 Year Guarantee

**Plain**

WMH1200	1200mm
WMH1500	1500mm
WMH2000	2000mm

**Elbows**

WMHE1200	1200mm
WMHE1500	1500mm
WMHE2000	2000mm

**Filter**

WMHF1200	1200mm
WMHF2000	2000mm

**Elbow and Filter**

WMHEF1200	1200mm
WMHEF2000	2000mm

WMHW	Washer for straight hose
WMHEW	Washer for elbow hose



Code	Description	Size	Unit
------	-------------	------	------

### 304 STAINLESS STEEL PARIGI WASHING MACHINE & DISHWASHER INLET HOSE

- Working temperature 5 – 70° degrees C
- Maximum working pressure 10 bar/146psi
- Maximum bending radius 35mm
- 10 Year Guarantee

#### Plain

WMH1200SS	1200mm
WMH2000SS	2000mm


#### Elbows

WMHE1200SS	1200mm
WMHE2000SS	2000mm



### STAINLESS STEEL FLEXIBLE HOSES PARIGI TERMOPAR FLEXIBLE HOSES

- Female/Female
- 304 Stainless steel braided hose
- Elastomeric thermoplastic' hose.
- Resistant to hydrolysis, total potability.
- Temperature range –5°C to 70°C
- Working pressure 10 bar / 146 psi
- Nickel plated brass nuts
- Made in Italy
- 10 Year guarantee

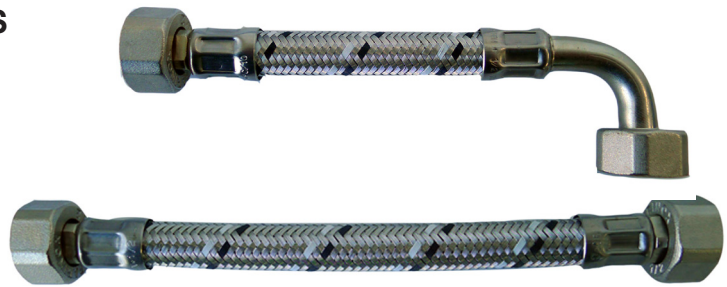

P15150	15mm x 150mm
P15200	15mm x 200mm
P15300	15mm x 300mm
P15400	15mm x 400mm
P15500	15mm x 500mm
P15600	15mm x 600mm
P151000	15mm x 1000mm
P151400	15mm x 1400mm

#### WITH ELBOW

PE15150	15mm x 150mm
PE15200	15mm x 200mm
PE15300	15mm x 300mm
PE15400	15mm x 400mm
PE15600	15mm x 600mm

Code	Description	Size	Unit
------	-------------	------	------

### STAINLESS STEEL FLEXIBLE HOSES PARIGI ANTI VIBRATION FLEXIBLE HOSES

- Female/Female
- Stainless steel braided hose
- Temperature range  $-5^{\circ}\text{C}$  to  $70^{\circ}\text{C}$
- Working pressure 6-15 bar
- Made in Italy

P20100	PN15	20mm x 100mm
P20100MF	PN15	20mm x 100mm male/female
P20300	PN15	20mm x 300mm
P20500	PN15	20mm x 500mm
P2050015	PN15	20mm x 500mm x DN15 hose
P20600	PN15	20mm x 600mm
P20700	PN15	20mm x 700mm
P20800	PN15	20mm x 800mm
P25300	PN15	25mm x 300mm
P25500	PN15	25mm x 500mm
P25600	PN15	25mm x 600mm
P32500	PN10	32mm x 500mm
P321000SS	PN10	32mm x 1000mm
P401000SS	PN10	40mm x 1000mm
P501000SS	PN6	50mm x 1000mm

#### **WITH ELBOW**

PE25330	PN15	25mm x 330mm
PE25600	PN15	25mm x 600mm
PE20600	PN15	20mm x 600mm



Code	Description	Size	Unit
------	-------------	------	------

**WATTS FLEXIBLE HOSES**

- Stainless Steel braided hose
- PEX tubing
- Working Pressure: 16 bar
- Temperature: Min 5° to Max 90°
- Watermark License WMKA210211

**8MM INTERNAL BORE**

W15150-8		15mm x 150mm	
W15200-8		15mm x 200mm	
W15225-8		15mm x 225mm	
W15300-8		15mm x 300mm	
W15400-8		15mm x 400mm	
W15450-8		15mm x 450mm	
W15500-8		15mm x 500mm	
W15600-8		15mm x 600mm	
W151000-8		15mm x 1000mm	
W151400-8		15mm x 1400mm	
W151500-8		15mm x 1500mm	

**WITH ELBOW**


WE15150-8		15mm x 150mm	
WE15200-8		15mm x 200mm	
WE15300-8		15mm x 300mm	
WE15400-8		15mm x 400mm	
WE15450-8		15mm x 450mm	
WE15600-8		15mm x 600mm	

**10MM INTERNAL BORE**

W15100-10		15mm x 100mm	
W15150-10		15mm x 150mm	
W15200-10		15mm x 200mm	
W15225-10		15mm x 225mm	
W15300-10		15mm x 300mm	
W15450-10		15mm x 450mm	
W15600-10		15mm x 600mm	
W151000-10		15mm x 1000mm	
W151500-10		15mm x 1500mm	

**WITH ELBOW**

WE15150-10		15mm x 150mm	
WE15200-10		15mm x 200mm	
WE15300-10		15mm x 300mm	
WE15450-10		15mm x 450mm	

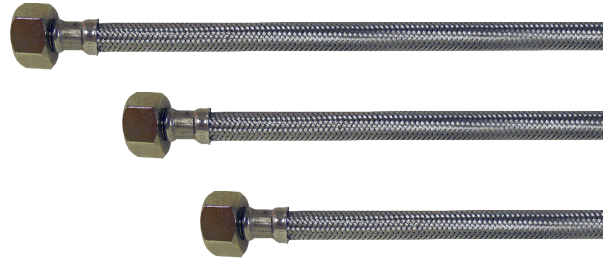




Code	Description	Size	Unit
------	-------------	------	------

## TAPS

### HOSE TAPS - ANGLE

- Temperature -0.5°C to 95°C.
- Installation type - Deck mounted.
- Threads: ISO228 (equivalent to DIN259 and BS2779)

3515DL		15mm Male	
3515FDL		15mm Female	
3520DL		20mm Male	

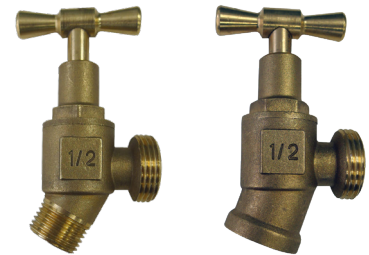

3515FCH	Chrome Hex Inlet	15mm Fem	
---------	------------------	----------	--



3520 DLK	Key Handle	15mm Male	
----------	------------	-----------	--



### POLYPROPYLENE HOSE TAP

- Chrome plated ball
- PTFE seats
- Not Marine rated
- 16 Bar
- Working temperature range: 0°C to +75°C

PPHTL15		15mm	
PPHTL20		20mm	
PPHTL25		25mm	



Code	Description	Size	Unit
------	-------------	------	------

**BUGATTI HOSE TAPS - LONG HANDLE**

- Material: Nickel Plated Brass
- Aluminium handle
- Temperature Range -20°C to +120°C
- Working Pressure 16 BAR

BHTL15		15mm	
BHTL20		20mm	
BHTL25		25mm	


**BUGATTI HOSE TAIL**

- Temperature Range -20°C to +120°C
- Working Pressure 16 BAR

BHTAIL15		15mm	
BHTAIL20		20mm	
BHTAIL25		25mm	


**JOHN GUEST FLEXIBLE HOSES**

Female Nut to Pex Pipe

FLX15		15 x 300mm
FLX18		15 x 500mm
FLX23		22 x 500mm
FLX24	c/w service valve	15 x 300mm
FLX31	c/w service valve	15 x 500mm
FLX34		10 x 300mm



Code	Description	Size	Unit
<b>CISTERN TAP &amp; WATTS HOSE</b>			
WCTH15F	W15300-10 c/w AVF15 Female Cistern Valve and Flange		
WCTH15-10	W15300-10 c/w AVM Male Cistern Valve and Flange Parigi		

### STAINLESS STEEL HOSES FOR BOILERS AND HOT WATER CYLINDERS

- Hose: Stainless Steel 316
- Fittings: Stainless Steel 303
- Working Pressure 6 BAR 87psi
- Temperature Range: -5°C to +150°C

TAM16FF	Female/Female	20mm x 220 - 400mm (extendable)
TAM16MF	Male/Female	20mm x 220 - 420mm (extendable)



### MIXER TAP HOSES

- Working pressure 10 BAR 147 psi
  - Temperature Range -5°C to +90°C
- |         |                           |
|---------|---------------------------|
| PA15300 | 15mm x 300mm with Adaptor |
|---------|---------------------------|

### CISTERN TAP & PARIGI HOSE

- Working Pressure 10 BAR 147 psi
- Temperature Range -5°C to +70°C

CTH15	P15300 Hose with AVM15 Cistern Valve (male) c/w flange
CTF15	P15300 Hose with AVS15 Angle Valve (female) c/w flange



Code	Description	Size	Unit
------	-------------	------	------

### TERMINATOR STOP (CISTERN TAP) & PARIGI HOSE

The swivel nut rubber cone Terminator cistern stop is spanner tightened and angle adjusted, particularly useful in confined spaces.

- Maximum temperature 70°C
- Working pressure 150-600kPa
- Complies with AS/NZS3718

CTH15S	P15300 Hose with SD15SNC Terminator stop		
--------	--	--	--



### PARIPLAST HOSE

CTWH15	PL15300 Hose with AVM15 Cistern Valve c/w Flange
CTWH15F	PL15300 Hose with AVF15 Cistern Valve c/w Flange



### WASHERS

P15W	Flat Black EPDM	15mm
P20W	Flat Black EPDM	20mm
P25WF	Flat - P25500	25mm
P32WF	Flat - P32500	32mm
P15HW	For CTH15 & CTF15	15mm
P15WC	Conical Black	15mm
P15WCW	Conical White	15mm
P15WT	Flat Thick for PL15300	15mm
P20WF	Flat Green for 20500, 20600 & 20800	20mm
P20WR	Rubber Black	20mm
P25WF	Flat Green for P25500	25mm
P32WF	Flat Green for P32500	32mm

Code	Description	Size	Unit
------	-------------	------	------

*All Tridon products are manufactured to either SAE or BS requirements and are accepted by all motor vehicle and industrial original equipment manufacturers. TS16949/ISO9001 quality accredited and ISO14001 environmentally accredited.*

### HOSE CLIP (PERFORATED BAND CLAMP)

- ALL Stainless Steel
- For marine, industrial, automotive, agricultural, chemical and general purpose use
- All Stainless Steel for corrosion protection
- Built to SAE J1508 standard
- Hexagonal head with screwdriver slot
- Low free torque for ease of installation
- Use in OE Applications
- Flexible band for superior sealing, conforms to hose
- High strength for reliable sealing
- Band and housing 301 Stainless Steel with 301 stainless steel screw

### MICRO BAND (NARROW)

MAH4	6mm - 16mm	10 (1 box)
MAH5	11mm - 18mm	10 (1 box)
MAH6	11mm - 22mm	10 (1 box)
MAH8	11mm - 25mm	10 (1 box)
MAH10	13mm - 27mm	10 (1 box)
MAH12	14mm - 32mm	10 (1 box)



### CARDED PACK (NARROW) QUANTITY: 2

MAH4C	6mm - 16mm
MAH5C	11mm - 18mm
MAH6C	11mm - 22mm

### REFILL PACK

MAH4RF	6-16mm
MAH5RF	11-18mm
MAH6RF	11-22mm

### REGULAR BAND (WIDE)

HAS8	13mm - 25mm	10 (1 box)
HAS10	14mm - 27mm	10 (1 box)
HAS12	18mm - 32mm	10 (1 box)
HAS16	21mm - 38mm	10 (1 box)
HAS20	21mm - 44mm	10 (1 box)
HAS24	27mm - 51mm	10 (1 box)
HAS28	33mm - 57mm	10 (1 box)
HAS32	40mm - 64mm	10 (1 box)
HAS36	46mm - 70mm	10 (1 box)
HAS40	52mm - 76mm	Available single units
HAS44	59mm - 83mm	Available single units
HAS48	65mm - 89mm	Available single units
HAS52	71mm - 95mm	Available single units
HAS56	78mm - 102mm	Available single units
HAS60	84mm - 108mm	Available single units
HAS64	90mm - 114mm	Available single units
HAS72	103mm - 127mm	Available single units
HAS80	117mm - 140mm	Available single units
HAS84	125mm - 146mm	Available single units



Code	Description	Size	Unit
HAS88		106mm - 152mm	Available single units
HAS96		115mm - 164mm	Available single units
HAS104		133mm - 178mm	Available single units
HAS128		175mm - 217mm	Available single units
HAS136		181mm - 225mm	Available single units
HAS152		206mm - 251mm	Available single units
HAS188		260mm - 311mm	Available single units
HAS212		298mm - 349mm	Available single units



### CARDED PACK (WIDE)

HAS10C		14mm - 27mm	2 per card
HAS12C		18mm - 32mm	2 per card
HAS16C		21mm - 38mm	2 per card
HAS20C		21mm - 44mm	1 per card
HAS24C		27mm - 51mm	1 per card
HAS28C		33mm - 57mm	1 per card
HAS32C		40mm - 64mm	1 per card
HAS36C		46mm - 70mm	1 per card



### REFILL PACK (WIDE)

HAS8RF		13-25mm	10
HAS10RF		14-27mm	10
HAS12RF		18-32mm	10
HAS16RF		21-38mm	10
HAS24RF		27-51mm	10
HAS28RF		33-57mm	10
HAS32RF		40-64mm	10

### NUT AND BOLT CLAMPS

- Carbon Steel Zinc Plated
- Ideal for use in confined spaces
- Fixed nut for ease of tightening
- OEM applications
- Rolled edge to prevent hose damage
- 6mm hexagonal head with screwdriver slot, 9mm band width

NA0709		7mm - 9mm
NA0911		9mm - 11mm
NA1214		12mm - 14mm
NA1315		13mm - 15mm
NA1416		14mm - 16mm



### T-BOLT CLAMPS

- Part Stainless Steel, Heavy Duty Clamp
- For heavy duty applications where large tightening forces are required
- 430 stainless steel band and bridge-carbon steel, zinc plated bolt, trunnions and collar
- Rolled edge to prevent hose damage
- Easy installation-a bolt is used for tightening not a nut which ensures full travel when using a socket
- Extra solid construction with the highest grade materials and 3 welds per band on larger sizes
- Solid trunnions with hex head bolt
- Superior sealing-tighter seals at lower bolt torques

TTB1719		17mm - 19mm
TTB2022		20mm - 22mm
TTB2628		26mm - 28mm
TTB2931		29mm - 31mm
TTB3235		32mm - 35mm
TTB3639		36mm - 39mm
TTB4043		40mm - 43mm
TTB4447		44mm - 47mm

## SECTION 8

Code	Description	Size	Unit
TTB4851		48mm - 51mm	
TTB5255		52mm - 55mm	
TTB5659		56mm - 59mm	
TTB6063		60mm - 63mm	
TTB6467		64mm - 67mm	
TTB6873		68mm - 73mm	
TTB7479		74mm - 79mm	
TTB8085		80mm - 85mm	
TTB8691		86mm - 91mm	
TTB9297		92mm - 97mm	
TTB104112		104mm - 112mm	
TTB113121		113mm - 121mm	
TTB122130		122mm - 130mm	
TTB131139		131mm - 139mm	
TTB149161		149mm - 161mm	
TTB175187		175mm - 187mm	



NB: Display Merchandisers are available

### T-BOLT CLAMPS

- All Stainless Steel, Heavy Duty Clamp
- For heavy duty applications where large tightening forces are required
- All 300 Series stainless steel for corrosion protection
- Rolled edge to prevent hose damage
- Easy installation-a bolt is used for tightening not a nut which ensures full travel when using a socket
- Extra solid construction with the highest grade materials and 3 welds per band on larger sizes
- Solid trunnions with hex head bolt
- Superior sealing-tighter seals at lower bolt torques

TTBS1719		17mm - 19mm
TTBS2022		20mm - 22mm
TTBS2325		23mm - 25mm
TTBS2628		26mm - 28mm
TTBS2931		29mm - 31mm
TTBS3235		32mm - 35mm
TTBS3639		36mm - 39mm
TTBS3841		38mm - 41mm
TTBS4043		40mm - 43mm
TTBS4245		42mm - 45mm
TTBS4447		44mm - 47mm
TTBS4851		48mm - 51mm
TTBS5255		52mm - 55mm
TTBS5659		56mm - 59mm
TTBS6063		60mm - 63mm
TTBS6467		64mm - 67mm
TTBS6873		68mm - 73mm
TTBS7176		71mm - 76mm
TTBS7479		74mm - 79mm
TTBS8085		80mm - 85mm
TTBS8691		86mm - 91mm
TTBS9297		92mm - 97mm
TTBS98103		98mm - 103mm
TTBS104112		104mm - 112mm
TTBS113121		113mm - 121mm
TTBS122130		122mm - 130mm
TTBS131139		131mm - 139mm
TTBS140148		140mm - 148mm
TTBS149161		149mm - 161mm
TTBS162174		162mm - 174mm
TTBS175187		175mm - 187mm
TTBS188200		188mm - 200mm



Code	Description	Size	Unit
TTBS201213		201mm - 213mm	
TTBS214226		214mm - 226mm	
TTBS227239		227mm - 239mm	
TTBS240252		240mm - 252mm	
TTBS253265		253mm - 265mm	
TTBS266278		266mm - 278mm	
TTBS279291		279mm - 291mm	
TTBS292304		292mm - 304mm	



## HOSE CLAMP PACKS

Ideal for farm, workshop, DIY or mobile use

MP125      Hose Clamp Multi Purpose Maintenance Pack  
(Solid Band, Part Stainless)

CWP150SS      Hose Clamp Workshop Pack  
(Perforated Band, All Stainless)



## MULTI PURPOSE GALVANISED HOSE CLIPS

### PART STAINLESS STEEL

- For industrial, hardware, automotive and general purpose use
- 430 stainless steel band
- Heavy duty, non-perforated band and housing
- Available with removable safety collar to prevent screwdriver slip injuries
- Rolled edge and smooth underside to prevent hose damage
- Technically advanced design improves sealing capability

000	9.5mm - 12mm	10 (1 box)
M00	11mm - 16mm	10 (1 box)
00	13mm - 20mm	10 (1 box)
R0	16mm - 22mm	10 (1 box)
0X	18mm - 25mm	10 (1 box)
00X	19mm - 22mm	10 (1 box)
1A	22mm - 30mm	10 (1 box)
1	25mm - 35mm	10 (1 box)
1X	30mm - 40mm	10 (1 box)
2A	35mm - 50mm	10 (1 box)
2	40mm - 55mm	10 (1 box)
2X	50mm - 60mm	Available single units
3	55mm - 70mm	Available single units
4	70mm - 90mm	Available single units
5	90mm - 120mm	Available single units
6	110mm - 140mm	Available single units
7	135mm - 160mm	Available single units



Code	Description	Size	Unit
------	-------------	------	------

**LAY FLAT HOSE CLIPS**

The clamp works by focusing the clamping force into two small channels, maximising the crush of the thin rubberised material to achieve the ultimate seal.

TLF020P		50mm	
TLF025P		65mm	
TLF030P		80mm	
TLF040P		100mm	

**CABLE TIE ASSORTMENT PACKS**

- Cable Ties are available in assorted materials, colours and sizes to suit all types of applications.
- Nylon Cable Ties are manufactured from virgin nylon 6/6 and are UL94V-2 flammable rated.
- Black Cable Ties have been U.V. Stabilised to resist material breakdown and increase service life.
- Stainless Steel Cable Ties are manufactured from 304 grade stainless steel with a unique ball locking mechanism.

CTP03	3 x 100mm	(Pkt 1000)
CTP07	3 x 100/150mm	(Pkt 500)
CTP08	3 x 100/200mm	(Pkt 500)
CTP10	3 x 100mm/5 x 120-200mm	(Pkt 75)
CTP11	3 x 80mm/4 x 200mm	(Pkt 250)
CTP13	3 x 100mm/5 x 120-200mm	(Pkt 150)
CTP18	4 x 150mm	(Pkt 75)
CTP20		(Pkt 40)

**CABLE TIE - BLACK (U.V. STABILISED)**

CT603BKCD	60 x 3mm	(Pkt 100)
CT103BKCD	100 x 3mm	(Pkt 100)
CT154BKCD	150 x 4mm	(Pkt 100)
CT204BKCD	200 x 4mm	(Pkt 100)
CT205BKCD	200 x 5mm	(Pkt 100)
CT208BKCD	200 x 8mm	(Pkt 25)
CT254BKCD	250 x 4mm	(Pkt 100)
CT255BKCD	250 x 5mm	(Pkt 100)
CT258BKCD	250 x 8mm	(Pkt 25)
CT304BKCD	300 x 4mm	(Pkt 100)
CT305BKCD	300 x 5mm	(Pkt 100)
CT308BKCD	300 x 8mm	(Pkt 25)
CT358BKCD	350 x 8mm	(Pkt 25)
CT405BKCD	400 x 5mm	(Pkt 25)
CT408BKCD	400 x 8mm	(Pkt 25)
CT455BKCD	450 x 5mm	(Pkt 25)
CT6512BKCD	580 x 12mm	(Pkt 25)
CT759BKCD	750 x 9mm	(Pkt 25)



Code	Description	Size	Unit
<b>CABLE TIE - BLACK BULK (U.V. STABILISED)</b>			
CTB603BK		60 x 3mm	(Pkt 500)
CTB103BK		100 x 3mm	(Pkt 500)
CTB154BK		150 x 4mm	(Pkt 500)
CTB204BK		200 x 4mm	(Pkt 500)
CTB205BK		200 x 5mm	(Pkt 500)
CTB255BK		250 x 5mm	(Pkt 500)
CTB305BK		300 x 5mm	(Pkt 500)
<b>CABLE TIE - NATURAL</b>			
CT103NTCD		100 x 3mm	(Pkt 100)
CT154NTCD		150 x 4mm	(Pkt 100)
CT204NTCD		200 x 4mm	(Pkt 100)
CT205NTCD		200 x 5mm	(Pkt 100)
CT208NTCD		200 x 8mm	(Pkt 25)
CT254NTCD		250 x 4mm	(Pkt 100)
CT255NTCD		250 x 5mm	(Pkt 100)
CT258NTCD		250 x 8mm	(Pkt 25)
CT304NTCD		300 x 4mm	(Pkt 100)
CT305NTCD		300 x 5mm	(Pkt 100)
CT308NTCD		300 x 8mm	(Pkt 25)
CT358NTCD		350 x 8mm	(Pkt 25)
CT405NTCD		400 x 5mm	(Pkt 25)
CT408NTCD		400 x 8mm	(Pkt 25)
CT455NTCD		450 x 5mm	(Pkt 25)
CT559NTCD		550 x 9mm	(Pkt 25)
CT603NTCD		60 x 3mm	(Pkt 100)
CT1009NTCD		1000 x 9mm	(Pkt 25)
<b>CABLE TIE - NATURAL BULK</b>			
CTB603NT		60 x 3mm	(Pkt 500)
CTB103NT		100 x 3mm	(Pkt 500)
CTB154NT		150 x 4mm	(Pkt 500)
CTB204NT		200 x 4mm	(Pkt 500)
CTB205NT		200 x 5mm	(Pkt 500)
CTB255NT		250 x 5mm	(Pkt 500)
CTB305NT		300 x 5mm	(Pkt 500)

