


# HYDROFLOW TANK SOLUTIONS

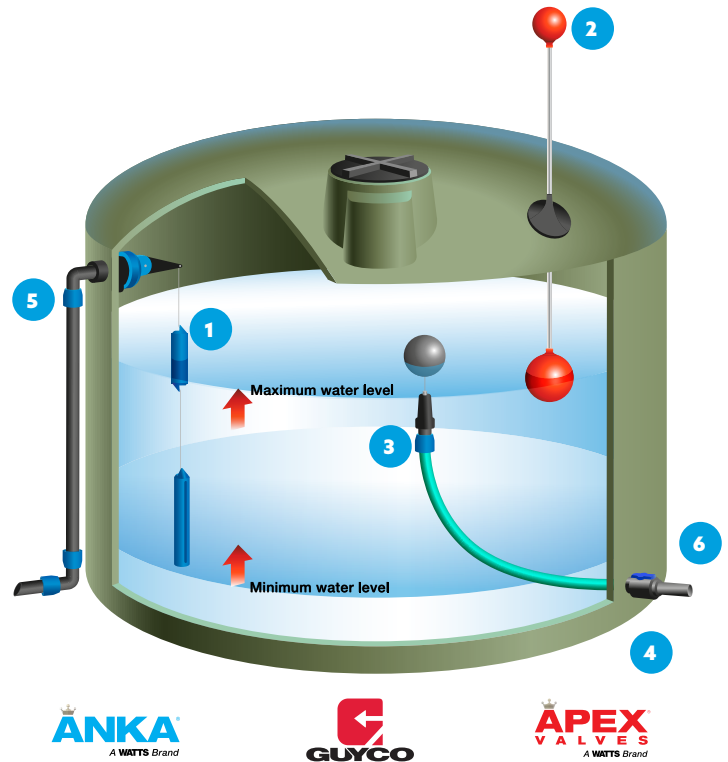

**ANKA**  
A WATTS Brand

**GUYCO**

**APEX**  
VALVES  
A WATTS Brand

1

## INLET VALVES

### [BIGBOY \(32, 40, 50MM\)](#)

- Adjustable water levels saves electricity & increases pump life
- Soft closing, no water hammer
- Extremely high flow rate 1500 L/min at 1200 kPa
- No float switches, no power required



### [PUMPBuddy \(20,25MM\)](#)

- Adjustable water levels saves electricity & increases pump life
- High flow rate 425 L/min at 1200 kPa
- No float switches, no power required

### [RAINAID RAINWATER HARVESTING VALVE](#)

- Long tail - no need for tank fittings on thin walled tanks
- Full on, full off
- No float switches, no power required
- Adjustable water levels saves electricity & increases pump life



2

## WATER LEVEL INDICATOR

### [VisiBALL](#)

- Uni-Ball adjusts to any water tank roof angle.
- Suitable for all tank types, concrete, plastic, fibreglass, wooden.
- Manufactured from UV resistant premium quality materials.



3

## FLOATING TANK INLET

### [TANKBUDDY \(25/32MM\)](#)

- Clean water is drawn from the top of the tank
- Reduces the risk of drawing contaminated water or sediment
- Non-corrodible, for use with potable water
- Serviceable



4

## BALL VALVES

### [GUYCO FEMALE/FEMALE BALL VALVES \(15-50MM\)](#)



- High quality true full flow valves
- Removable handle for security
- Corrosion Resistant
- UV Stabilised
- Pressure rating: 16 Bar/235 PSI @ 20°C
- Smooth open and close action

5

## PIPE FITTINGS

### [ANKA LDPE FITTINGS \(15-50MM\)](#)



- Quick and easy to fit
- Blue nut is easily visible from a distance
- Non-corrosive
- Approved for use with potable water
- Glass Fibre Reinforced Nylon

6

## TANK FITTINGS

### [GUYCO FEMALE TANK FITTINGS \(15-50MM\)](#)



- Glass Fibre Reinforced Nylon
- UV stabilised
- Approved for use with potable water
- BSPT Thread