HYDROFL^{[°]W}

Esse Slip Repair Coupling



Patented Sealing System

SAB Blueseal compression fittings are made of polypropylene (PP) for joining polyethylene (PE) pipes, and are tested to withstand the working pressure of 16 bars (PN16).

Blueseall6 fittings obtained the most prestigious certificates from leading international bodies, and therefore, they are suitable for potable water pipelines.

The special feature that distinguishes the Blueseal16 fitting from others on the market is the patented sealing system, which consists of a unified lip gasket and a characteristic blue spacer ring, making it unique and singular. This sealing system is designed to push the gasket against the pipe wall thanks to the slide effect: when in the water piping system is put under pressure, this effect amplifies the seal. This occurs even in case of damaged pipes with some defects. Another special feature is a quick and easy installation, thanks to the shape of the gasket, designed to make the pipe insertion much easier.

Features

Patented sealing system

High water tightness reliability

Easy and quick installation

High shock absorption ability

Wide range of fittings






For more information on this product scan the QR code or visit hydroflow.co.nz



hydroflow.co.nz

HYDROFLOW

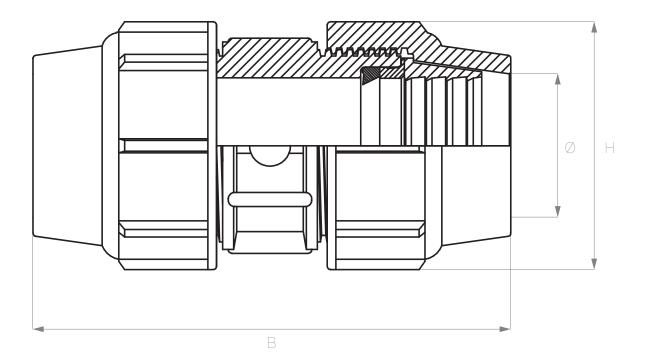

CODE	PRODUCT NAME	SIZE (mm)	PN	Dimensions (mm)		Weight
		Ø	bar	В	Н	gr
ESRC20	Esse Slip Repair Coupling 20mm	20	16	115	47	82
ESRC25	Esse Slip Repair Coupling 25mm	25	16	115	54	105
ESRC32	Esse Slip Repair Coupling 32mm	32	16	138	65	172
ESRC40	Esse Slip Repair Coupling 40mm	40	16	210	83	314
ESRC50	Esse Slip Repair Coupling 50mm	50	16	177	97	450
ESRC63	Esse Slip Repair Coupling 63mm	63	16	220	114	753
ESRC75	Esse Slip Repair Coupling 75mm	75	16	236	133	1090
ESRC90	Esse Slip Repair Coupling 90mm	90	16	282	154	1674
ESRC110	Esse Slip Repair Coupling 110mm	110	16	347	184	2757

hydroflow.co.nz